


COMM

ICOM

IC-A200

## Connector

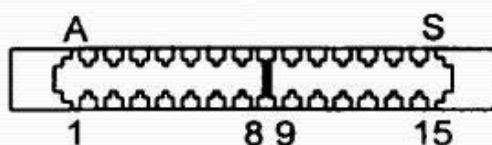

Circuit	Pin #
+13.8 VDC POWER.....	14
+13.8 VDC POWER.....	R
+14V LIGHTING.....	B
13.8 VDC POWER IN.....	11
13.8 VDC POWER IN.....	M
4 OHM SPEAKER.....	E
500 OHMS PHONE AUDIO OUT.....	H
AUX AUDIO IN 1.....	D
AUX AUDIO IN 2.....	C
AUX AUDIO IN 3.....	3
COMM MIC AUDIO.....	J
DETECTED AUDIO.....	2
FREQ EXCHANGE SWITCH.....	12
GROUND FOR PIN B.....	1
INTERCOM MIC AUDIO.....	K
MEMORY CHANNEL SWITCH.....	L
NO CONN.....	A
POWER GROUND.....	15
POWER GROUND.....	6
POWER GROUND.....	F
POWER GROUND.....	S
PTT.....	9
SHIELD GROUND AUX AUDIO.....	4

(Continued)

For familiarization only. Consult the manufacturers current data.

*(IC-A200 Continued)*

SHIELD GROUND SPEAKER.....	5
SHIELD GROUND PHONE.....	7
SHIELD GROUND PTT MIC .....	8
SQUELCH CANCEL .....	10
SWITCHED AIRCRAFT POWER.....	13
SWITCHED AIRCRAFT POWER.....	P
XMIT/RECEIVE INTERLOCK .....	N

For familiarization only. Consult the manufacturers current data.