


COMM

KING

KY 196A

Connector

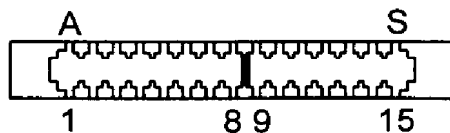

Circuit	Pin#	Notes
+ 28 VDC LIGHTING HIGH.....	1	
27.5 VDC POWER IN.....	14	Note 1
27.5 VDC POWER IN.....	R	Note 1
500 OHM AUDIO OUT.....	H	
AGC TEST / REMOTE CHAN INC.....	L	
DET AUDIO OUT.....	2	
DIM SELECT.....	A	Note 2
IC KEY.....	9	
INTERCOM MIC AUDIO.....	K	
MIC AUDIO.....	J	
N/C.....	3	
N/C.....	4	
N/C.....	5	
N/C.....	B	
N/C.....	C	
N/C.....	D	
N/C.....	E	
POWER GROUND.....	15	
POWER GROUND.....	6	
POWER GROUND.....	F	
POWER GROUND.....	S	
REMOTE XFR.....	11	
SHIELD.....	7	

(Continued)

For familiarization only. Consult the manufacturers current data.

(KY 196A Continued)

SHIELD.....	8	
SQ TEST & COMPRESSION TEST.....	10	
SWITCHED POWER.....	12	Note 3
SWITCHED POWER.....	13	Note 3
SWITCHED POWER.....	N	Note 3
SWITCHED POWER.....	P	Note 3
XMIT REC INTERLOCK.....	M	

Notes

1. Power in both
2. For continuous backlight 28 VDC. Tracking photocell leave open.
For Dimmer ground.
3. Jumper N to P and 12 to 13

For familiarization only. Consult the manufacturers current data.